

SERIES 25 CLASSIC



Dimensions in: mm/inch

Series 25 Classic

**Navigation lights –
Classic look with stainless steel components**

Application

Application depending on required visibilities.
See table in technical information.

Housing

Polycarbonate black or white, impact and shock resistant, non-corrosive, non-magnetic, seawater resistant

Optics

Lens: Fresnel, range of visibility 2 nm (starboard, port and bicolor 1 nm). Material: plastic, impact resistant and shock-proof, seawater resistant

Protection degree

IP 45



Mounting

Side-mount


Electric

With 2-wire cable,
bulb included

1



2

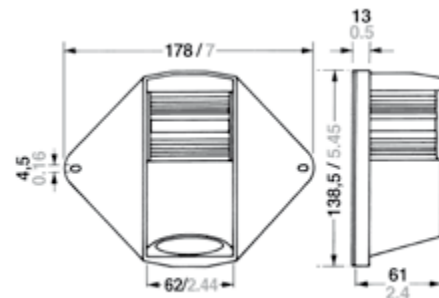

No.		Description	Ship size	Wattage	Visibility	Housing colour	Mounting	Voltage	Article number
1		Starboard	< 12 m / < 39 ft.	10 W	1 nm	Black	side-mount	12 V	3511102000
		Starboard	< 12 m / < 39 ft.	10 W	1 nm	White	side-mount	12 V	3511195000
		Port	< 12 m / < 39 ft.	10 W	1 nm	Black	side-mount	12 V	3510202000
		Port	< 12 m / < 39 ft.	10 W	1 nm	White	side-mount	12 V	3510295000
		Bicolor	< 12 m / < 39 ft.	10 W	1 nm	Black	side-mount	12 V	3512302000
		Bicolor	< 12 m / < 39 ft.	10 W	1 nm	White	side-mount	12 V	3512395000
		Masthead	< 12 m / < 39 ft.	10 W	2 nm	Black	side-mount	12 V	3508002000
		Masthead	< 12 m / < 39 ft.	10 W	2 nm	White	side-mount	12 V	3508095000
		Stern	< 50 m / < 164 ft.	10 W	2 nm	Black	side-mount	12 V	3509002000
		Stern	< 50 m / < 164 ft.	10 W	2 nm	White	side-mount	12 V	3509095000
2		Masthead / foredeck combination	< 12 m / < 39 ft.	10 W (Masthead), 20 W (Foredeck)	2 nm	Black	mast only, side-mount	12 V	3106012000

Spare Parts /* Extras
Ersatzteile /* Zubehör
Pièces de rechange /* Accessoires

